



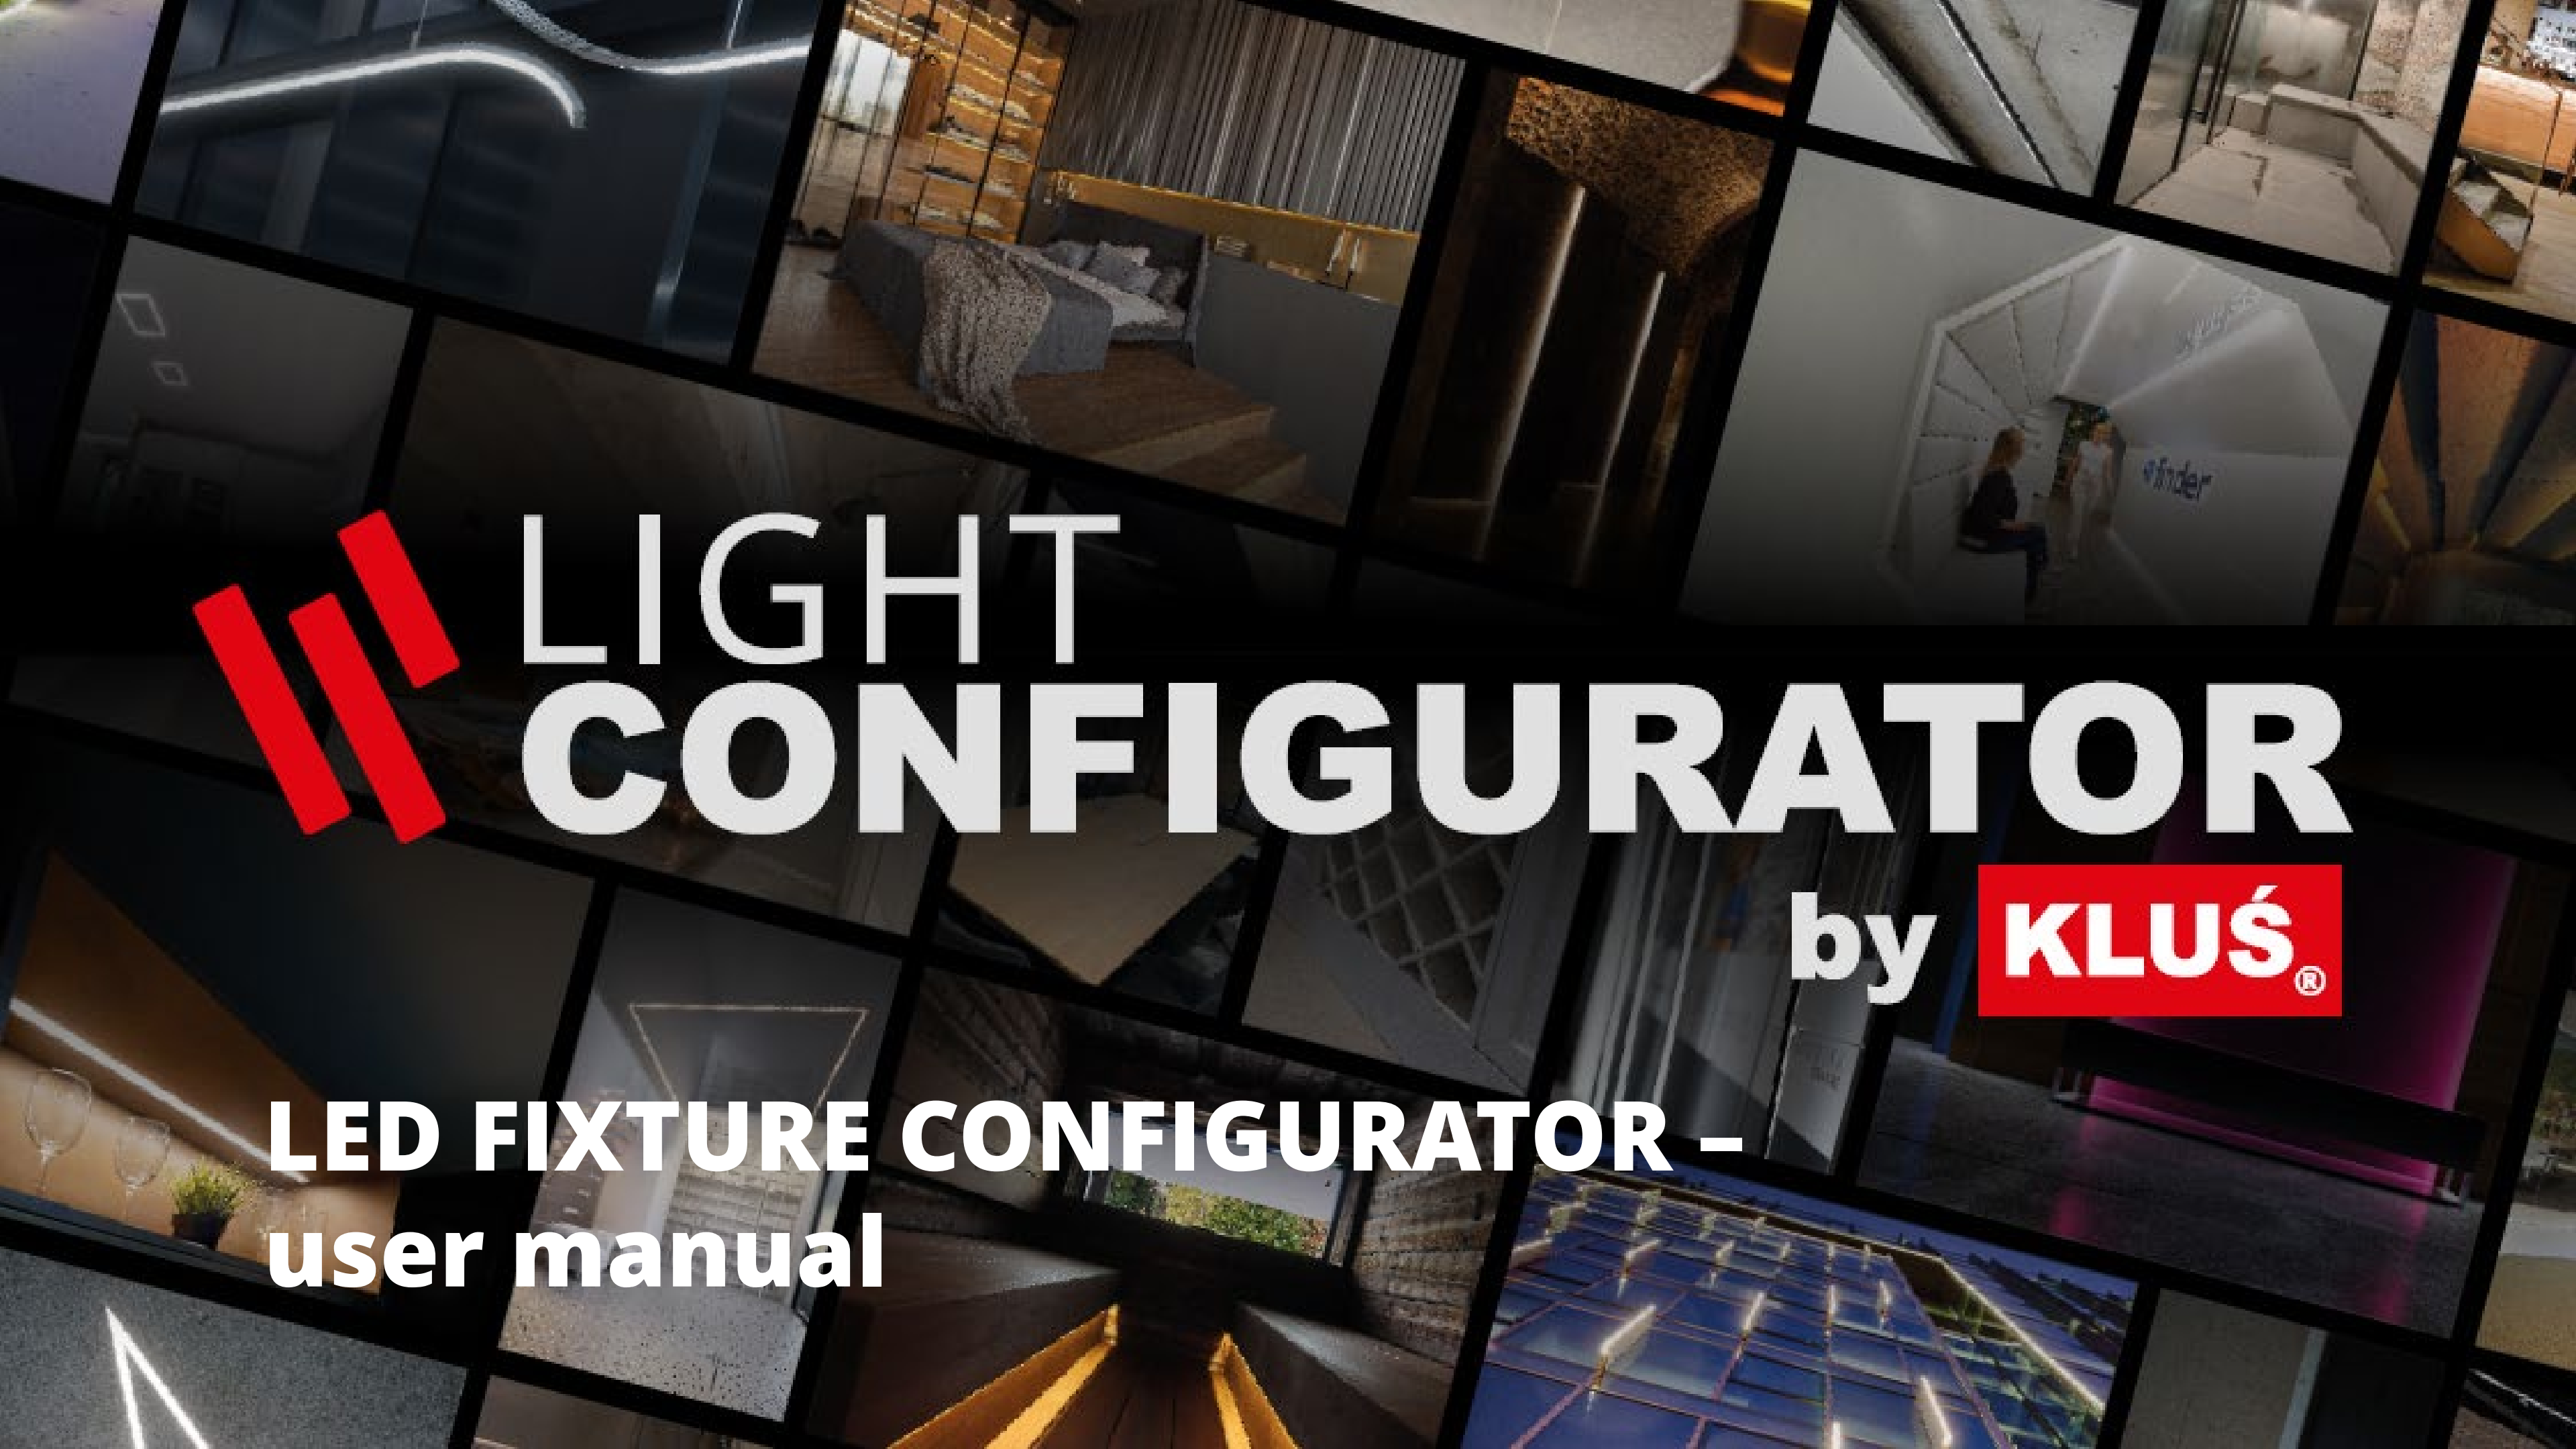

LIGHT CONFIGURATOR

by **KLUŚ®**

**LED FIXTURE CONFIGURATOR –
user manual**

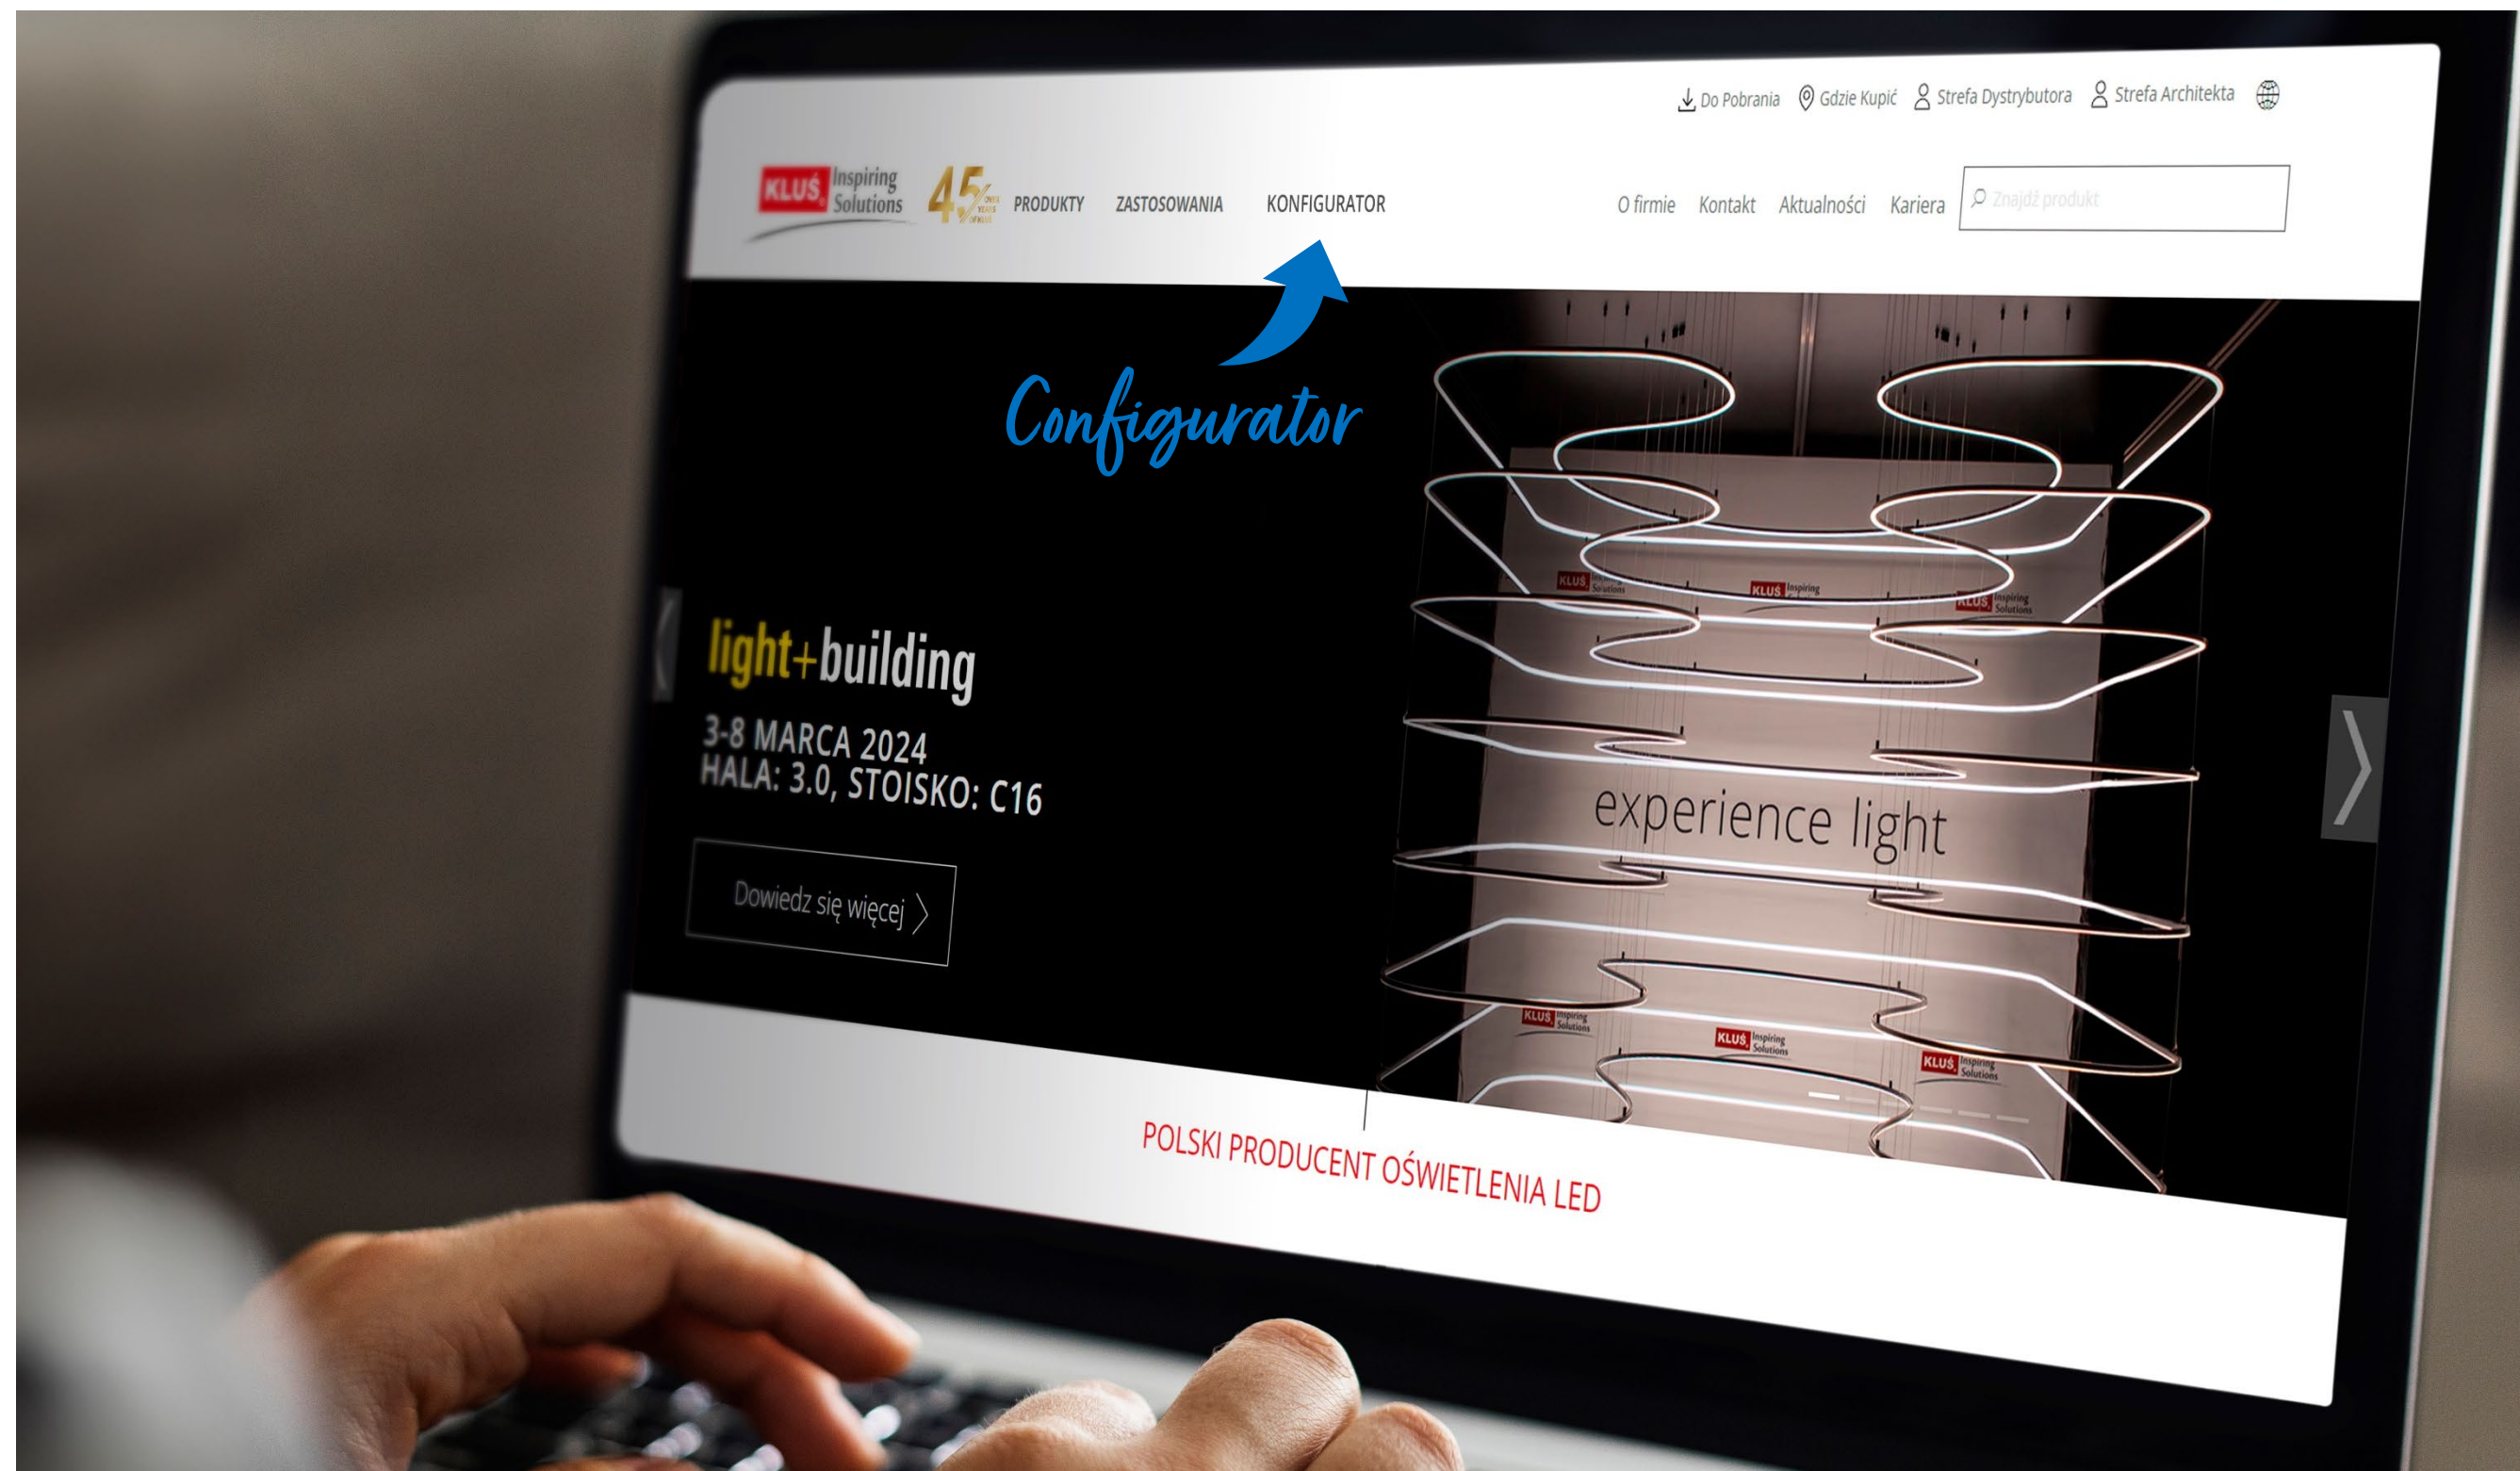

Start configuration at klusdesign.pl and select the CONFIGURATOR tab from the top menu

Welcome to the fixture configurator

Intuitive tool for creating your LED luminaires

Filter luminaire by: IP protection

IP20



Mounting type

surface mounted



Colour

silver



Luminous width [mm]

20-45 mm



Profile GIZA

Ref: A05556



Profile GIZA-LL

Ref: A00758



Profile GIZA-LL-ZMG

Ref: A04501



Profile HR-OPTI

Ref: A01844



Profile LIPOD

Ref: A05554



Profile LIPOD-50

Ref: A02609

Use the filters and select parameters. Select the profile you are interested in.


(1)

Return to profile list

PROFILE GIZA

(3)

(2)

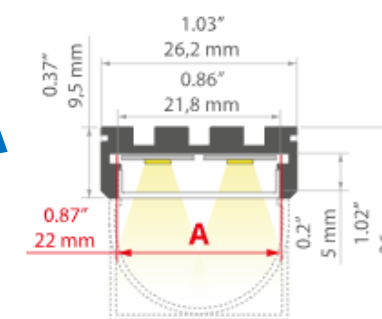

(4)

FIXTURE CODE: **FN05556-A01B**

PROFILE

IP PROTECTION RATING

IP20

MOUNTING METHOD

surface mounted

COLOUR

silver

FINISH

anodized

LENGTH [MM]

LENGTH ADJUSTMENT

Yes

BACK

(6)

CONTINUE


(5)

The configurator consists of the following elements:

Profile name (1), technical drawing of the profile (2), visualization of the finished luminaire (3), code of the finished luminaire (4), the NEXT button (5) is used to proceed to the next stage, the BACK button (6) is used to go to the previous stage. With it you can make changes by going back to the appropriate stage.

Return to profile list

PROFILE GIZA

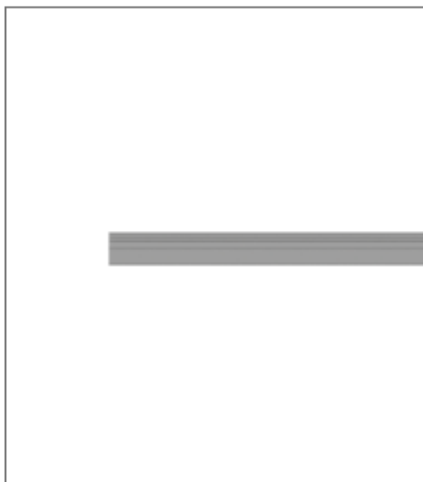

FIXTURE CODE: **FN055**

PROFILE

IP PROTECTION RATING
IP20

MOUNTING METHOD
surface mounted

COLOUR
silver

FINISH
anodized


LENGHT [MM]
1000
2005
3010
custom

LENGTH ADJUSTMENT
-Select option-
-Select option-
Yes
No


BACK

CONTINUE

Due to the different cutting sections of LED strips and the selected profile length, there may be an under-lighting effect at both ends of the luminaire. Do you decide that we should optimize the length of the luminaire ourselves (shorten or lengthen +- 100 mm) so as to avoid the underexposure effect?

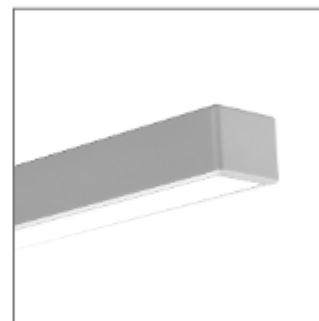


Yes

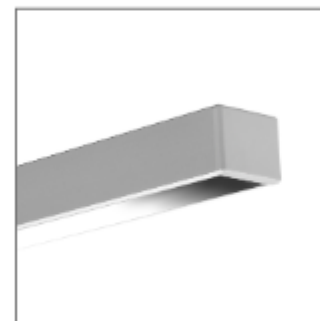

No

SELECT

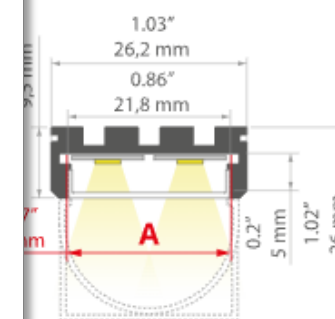

Specify profile parameters, select options using the drop-down list or icon. Click NEXT button.

← Return to profile list

PROFILE GIZA

FIXTURE CODE: **FN05556-A01S110B**

PROFILE

IP PROTECTION RATING

IP20

MOUNTING METHOD

surface mounted

COVER

TYPE

satin


NAME

-Select option-

G-22R

G-22S

LIGER-22

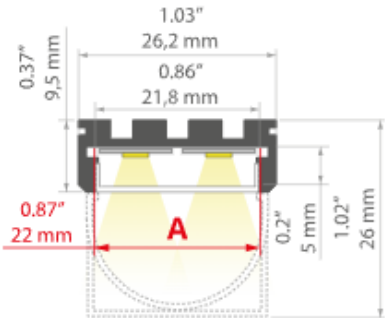



Cover G-22R



Cover G-22S



Cover LIGER-22

SELECT

BACK

CONTINUE

Determine the optics parameters, click NEXT to continue.

← Return to profile list

PROFILE GIZA



FIXTURE CODE: **FN05556-A01S1300310B**

PROFILE

IP PROTECTION RATING

IP20

MOUNTING METHOD

surface mounted

COLOUR

silver

FINISH

anodized

LENGTH [MM]

1000

LENGTH ADJUSTMENT

Yes

COVER

TYPE

satin

NAME

LIGER-22

LED TAPES

LUMEN OUTPUT

HIGH

COLOUR TEMPERATURE [K]

4000

LED ROWS

2

BACK

CONTINUE

Specify the parameters of the light source: LOW – decorative lighting, MEDIUM and HIGH – general lighting.

FIXTURE CODE: **FN05556**

PROFILE

IP PROTECTION RATING ☒ MOUNTING

COVER

TYPE ☒ NAME

ACCESSORIES

PRODUCT GROUP	COLOUR	NAME	CABLE	WIRE OUT	CONTROLS / COMMUNICATION
Mounting bracket	silver	GIP-STN-90D 	1.5 m	back of extrusion	-Select option-

Mounting bracket selection window:



Mounting bracket GIP-STN-90D



Mounting bracket GIP-UV




Mounting bracket AM-24




Mounting bracket GIP-STN

SELECT

Technical drawing:

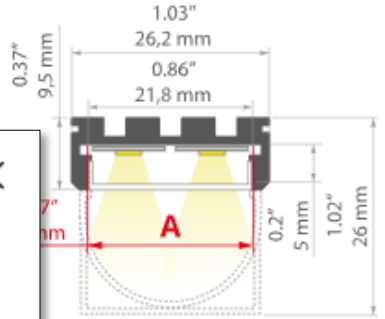

Select mounting accessories, click on the icon next to drop-down list to see the selected product.

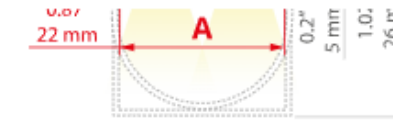

FIXTURE CODE: **FN05556-A01S1300310B**

PROFILE

IP PROTECTION RATING

IP20

MOUNTING METHOD

surface mounted

COLOUR

silver

FINISH

anodized

LENGTH [MM]

1000

LENGTH ADJUSTMENT

Yes

COVER

TYPE

satın

NAME

LIGER-22

LED TAPES

LUMEN OUTPUT

HIGH

COLOUR TEMPERATURE [K]

4000

LED ROWS

2

ACCESSORIES

PRODUCT GROUP

Mounting bracket

COLOUR

silver

NAME

GIP-STN-90D

CABLE

1.5 m

WIRE OUT

back of extrusion

CONTROLS / COMMUNICATION

on/off

END CAPS

NAME

GIZA

COLOUR

silver

BACK

CONTINUE

The type of end cap will be selected automatically. Choose its color.

PROFILE

IP PROTECTION RATING

IP20

✓

MOUNTING METHOD

surface mounted

✓

COLOUR

silver

✓

FINISH

anodized

✓

LENGHT [MM]

1000

✓

LENGTH ADJUSTMENT

Yes

✓

COVER

TYPE

satin

✓

NAME

LIGER-22

✓

LED TAPES

LUMEN OUTPUT

HIGH

✓

COLOUR TEMPERATURE [K]

4000

✓

LED ROWS

2

✓

ACCESSORIES

PRODUCT GROUP

Mounting bracket

✓

COLOUR

silver

✓

NAME

GIP-STN-90D

✓

CABLE

1.5 m

✓

WIRE OUT

back of extrusion

✓

CONTROLS / COMMUNICATION

on/off

✓

END CAPS

NAME

GIZA

✓

COLOUR

silver

✓

BACK

Additional info (fill up if necessary)

Silver, LED fixtures, office lightingD

1

+ ADD FIXTURE TO THE PROJECT

Complete additional information and click ADD FIXTURE TO PROJECT.
Enter all your remarks – they will be applied to quotation.

SUMMARY

office lighting, fixtures above desks

Fixture code: FN05556-A01S1300310B

QTY

10

Profile	IP protection	Mounting type	Colour	Finish	Lenght [mm]	Cover	Colour	Colour temp. [K]	Fixture lumen output [lm/m]	Fixture power [W/m]	Fixture efficiency [lm/W]	Controls
GIZA	IP20	surface mounted	silver	anodized	1000	LIGER-22	satin	4000	2484	28.8	86.25	on/off

DETAILS

Additional parameters

Length adjustment: Yes

LED rows: 2

Wire out : back of extrusion

Cable: 1.5 m

Additional info

Silver, LED fixtures, office lightingD

TECHNICAL FILES

☒ CE Declaration of Conformity

☐ 3ds model

☐ LDT

☐ UKCA Declaration

☒ DWG model

Download

Select all

COPY TO A NEW CONFIGURATION

RECONFIGURE

DELETE

+ ADD NEW CONFIGURATION

REQUEST A QUOTE

In the summary, enter the name of the project and the number of luminaires.
Declarations of conformity, photometric files and 2D/3D models are available for download in details.

SUMMARY

office lighting, fixtures above desks

Fixture code: FN05556-A01S1300310B

QTY

Profile	IP protection	Mounting type	Colour	Finish	Lenght [mm]	Cover	Colour	Colour temp. [K]	Fixture lumen output [lm/m]	Fixture power [W/m]	Fixture efficiency [lm/W]	Controls	
GIZA	IP20	surface mounted	silver	anodized	1000	LIGER-22	satin	4000	2484	28.8	86.25	on/off	10

DETAILS

Additional parameters

Length adjustment: Yes

LED rows: 2

Wire out : back of extrusion

Cable: 1.5 m

Additional info

Silver, LED fixtures, office lightingD

TECHNICAL FILES

☒ CE Declaration of Conformity

☐ 3ds model

☐ LDT

☐ UKCA Declaration

☒ DWG model

Download

Select all

COPY TO A NEW CONFIGURATION

RECONFIGURE

DELETE

+ ADD NEW CONFIGURATION

REQUEST A QUOTE

Save time by selecting the COPY TO NEW CONFIGURATION button if you want to add a similar fixture. The RECONFIGURE button allows you to edit the configuration. DELETE button resets the configuration. ADD NEW CONFIGURATION buton - possibility to start another configuration. REQUEST A QUOTE button - quote inquiry form.

office lighting, fixtures above desks

Fixture code: FN05556-A01S1300310B

Profile	IP protection	Mounting type	Colour	Finish
GIZA	IP20	surface mounted	silver	anodized

DETAILS

Additional parameters

Length adjustment: Yes

LED rows: 2

Wire out : back of extrusion

Cable: 1.5 m

Additional info

Silver, LED fixtures, office lightingD

TECHNICAL FILES

☒ CE Declaration of Conformity

☐ 3ds model

☐ LDT

☐ UKCA Declaration

☒ DWG model

Download

Select all

Enter your contact details

office lighting, fixtures above desks

Firstname

Surname

Company

VAT ID

Email

Phone

☐ I accept the Information Clause*

☐ I consent to receiving commercial information (including offers) and marketing messages from KLUS on the email address provided in the form.*

☐ I consent to the sharing of my personal data with the nearest distributor of the KLUS brand in my country.

BACK TO EDIT

SUMMARY

W/m

Fixture efficiency [lm/W]

Controls

10

86.25

on/off

QTY

You will receive a summary of your inquiry by email

Click **Inquiry Details** to view it in your browser

Technical files are also available for download in the **Technical files** section

In the email attachment you will receive a PDF file with a summary of your inquiry

CONFIGURATION

RECONFIGURE

DELETE

Complete the contact form and click SUMMARY. Check the project summary and click SEND. Your inquiry will be proceed to sales department, you will receive response by e-mail in one working day.